


**LIFT**  
**CHECK VALVE**  
升降式止回阀

Scientific Technological Innovation  
Source of Prosperity

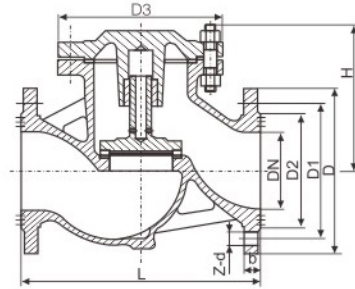

公称通径 DN	L	D	D1	D2	D6	B	Z-Φd	H	重量 (kg)
<b>H41H-16C H41W-16C H41W-16P H41W-16R H41W-16I</b>									
15	130	95	65	45		14	4-14	77	-
20	150	105	75	55		14	4-14	77	-
25	160	115	85	65		14	4-14	80	-
32	180	135	100	78		16	4-18	85	-
40	200	145	110	85		16	4-18	95	-
50	230	160	125	100		16	4-18	105	-
65	290	180	145	120		18	4-18	120	-
80	310	195	160	135		20	8-18	130	-
100	350	215	180	155		20	8-18	140	-
125	400	245	210	185		22	8-18	155	-
150	480	280	240	210		24	8-23	180	-
200	600	335	295	265		26	12-23	215	-
250	730	405	355	320		30	12-25	260	-
300	850	460	410	375		34	12-25	315	-
<b>H41H-25 H41W-25 H41W-25P H41W-25R H41W-25I</b>									
15	130	95	65	45		16	4-14	100	-
20	150	105	75	55		16	4-14	105	-
25	160	115	85	65		16	4-14	120	-
32	180	135	100	78		18	4-18	130	-
40	200	145	110	85		18	4-18	135	-
50	230	160	125	100		20	4-18	149	-
65	290	180	145	120		22	8-18	160	-
80	310	195	160	135		22	8-18	169	-
100	350	230	190	160		24	8-23	194	-
125	400	270	220	180		28	8-25	222	-
150	480	300	250	218		30	8-25	255	-
200	600	360	310	278		34	12-25	305	-
250	730	425	370	332		36	12-30	355	-
300	850	485	430	390		40	16-30	410	-
<b>H41H-40 H41W-40 H41W-40P H41W-40R H41W-40I</b>									
15	130	95	65	45	40	16	4-14	100	-
20	150	105	75	55	51	16	4-14	105	-
25	160	115	85	65	58	16	4-14	120	-
32	180	135	100	78	66	18	4-18	130	-
40	200	145	110	85	76	18	4-18	135	-
50	230	160	125	100	88	20	4-18	149	-
65	290	180	145	120	110	22	8-18	160	-
80	310	195	160	135	121	22	8-18	169	-
100	350	230	190	160	150	24	8-23	194	-
125	400	270	220	188	176	28	8-25	225	-
150	480	300	250	218	204	30	8-25	255	-
200	600	375	320	282	260	38	12-30	305	-
250	730	445	385	345	313	42	12-34	360	-
300	850	510	450	408	364	46	12-34	415	-
<b>H41H-64 H41W-64 H41W-64P H41W-64R H41W-64I</b>									
15	210	105	75	55	40	18	4-14	100	-
20	230	125	90	68	51	20	4-18	110	-
25	230	135	100	78	58	22	4-18	125	-
32	260	150	110	82	66	24	4-23	140	-
40	260	165	125	95	76	24	4-23	168	-
50	300	175	135	105	88	26	4-23	170	-
65	340	200	160	130	110	28	8-23	188	-
80	380	210	170	140	121	30	8-23	205	-
100	430	250	200	168	150	32	8-25	230	-
125	500	295	240	202	176	36	8-30	230	-
150	550	340	280	240	204	38	8-34	265	-
200	650	405	345	300	260	44	12-34	310	-